


03-31-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: EDWARD A. HUBBARD  
Filed: MARCH 30, 2000  
For: DISTRIBUTED BACK-UP SYSTEM AND  
ASSOCIATED METHOD  
Serial No.: UNKNOWN  
Group Art Unit: UNKNOWN  
Examiner: UNKNOWN  
Atty Docket No.: BAY3:008

JC530 U.S. PTO  
09/539107  
03/30/00

EXPRESS MAIL CERTIFICATION	
NUMBER: EK736438870US	
I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service, postage prepaid, under 37 C.F.R. 1.10 on the date indicated below and is addressed to: Assistant Commissioner of Patents, Washington, D.C. 20231.	
 Signature	March 30, 2000 Date of Deposit

BOX NEW APP/FEE  
Assistant Commissioner For Patents  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing are:

- ☒ New Patent Application consisting of 45 pages and 18 Figs. on 8 sheets
- ☐ Continued Prosecution Application (37 CFR §1.53(d)) -- The parent application is USSN \_\_\_\_\_ filed on \_\_\_\_\_. The prior Examiner was \_\_\_\_\_ in Group Art Unit \_\_\_\_\_.
- ☐ Response to Missing Parts
- ☐ Assignment and Recordation Cover sheet -- the parent application is assigned of record to \_\_\_\_\_.
- ☒ Inventors' Declaration/Power of Attorney


- ☐ Information Disclosure Statement
- ☐ Petition for a \_\_\_\_\_ month extension of time
- ☐ Response to Office Action
- ☐ Preliminary Amendment
- ☐ Formal Drawings
- ☐ Informal Drawings
- ☐ Notice of Appeal
- ☐ An Appeal Brief (an original and two copies)
- ☒ Check in the amount of \$ 381
- ☒ The Commissioner is authorized to deduct any requisite fees under 37 CFR 1.16 to 1.21 from, or deposit any credits to, Deposit Account No. 10-1205/BAY3:008.
- ☒ Postcard. Please date stamp and mail this postcard to acknowledge receipt of the enclosed documents.
- ☒ Other: Verified Statement Claiming Small Entity Status

### FEE CALCULATION:

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	Total Claims (37 CFR 1.16(e))	<u>24</u> - 20 =	4	x \$ 18.00	\$ 72
	Independent Claims (37 CFR 1.16(b))	<u>2</u> - 3 =	0	x \$ 78.00	\$ 0
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			x \$ 260.00	\$ 0
				Basic Fee (37 CFR 1.16(a))	\$ 690
				Total of above Calculations =	\$762
	Reduction by 50% for filing by Small Entity (Note: 37 CFR 1.9, 1.27, 1.28)				\$381
	Surcharge for submission of Response to Missing Parts if applicable (\$130)				\$0
	ASSIGNMENT FEE (IF FILED WITH APPLICATION)				\$0
	TOTAL =				\$381

The Examiner is invited to contact the undersigned at 512-347-1611 with any questions or comments, or to otherwise facilitate expeditious prosecution of the application.

Respectfully submitted,

  
Brian W. Peterman  
Registration No. 37,908  
Attorney for Applicant

O'KEEFE, EGAN & PETERMAN, L.L.P.  
1101 Capital of Texas Highway South  
Building C, Suite 200  
Austin, Texas 78746  
512-347-1611  
512-347-1615 (Fax)

---

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c)) – INDEPENDENT INVENTOR

---

DOCKET NO.  
BAY3:008

Applicant or Patentee: EDWARD A. HUBBARD

Application No.: UNKNOWN

Filed: MARCH 30, 2000

Title: DISTRIBUTED BACK-UP SYSTEM AND ASSOCIATED METHOD

I hereby declare that I qualify as an independent inventor as defined in 37 CFR § 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the above entitled invention described in the specification filed March 30, 2000.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CRR § 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR § 1.9(d) or a nonprofit organization under 37 CFR § 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern or organization  
☐ persons, concerns or organizations listed below

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment,



Patent Application for

**DISTRIBUTED BACK-UP SYSTEM  
AND ASSOCIATED METHOD**

5

Inventor: Edward A. Hubbard

**Technical Field of the Invention**

This invention relates distributing project workloads among a multitude of distributed devices and more particularly to techniques and related methods for managing, facilitating and implementing distributed processing in a network environment.

**Background**

Prior processing systems have included the technique of multiple users within a company sharing processing time available on a mainframe or central processing system. Using small segments of mainframe processing time, departments within the company would often incur costs associated with using the processing time, which in turn was billed back to each department from the central information technology (IT) organization for the company. In other instances, a company could pay for and utilize processing time made available by third-party companies who possessed an over-capacity of mainframe processing power. These third-party companies would, in effect, create a market for the mainframe processing time that went unused by the internal organizations of that third-party company.

20

Prior processing techniques have also included distributed processing projects that have utilized the Internet or World Wide Web. These distributed processing research projects have

used a multitude of personal computers (PCs) connected to the Internet to provide processing power to accomplish research project goals. Research project goals have been, for example, identifying large prime numbers, analyzing radio telescope data, and analyzing code keys in an encryption deciphering contest.

5

One example of a distributed processing project on the Internet is a research project housed at the University of California at Berkeley to analyze sky recording data gathered by SETI (the Search for Extraterrestrial Intelligence). This sky recording data has been gathered for some time from the large Arecibo Radio Telescope in Puerto Rico. The processing power needed to analyze these data recordings was very large. At the peak of SETI's capture activities, SETI had accumulated over 100,000 years of signals to process, as measured by the compute power necessary to process all the signals. To analyze this data, software was developed that could be downloaded to Internet connected PCs so that these PCs could process small slices of these sky recordings. In under a year, this project, called SETI@home (URL in March 2000 - [www.setiathome.ssl.berkeley.edu](http://www.setiathome.ssl.berkeley.edu)) has completely processed this backlog of data and is now returning to the sky recording dataset for further processing tasks. This massively parallel distributed system currently has a processing throughput of over 10 TFLOPs (terraFLOPS or  $10^{12}$  floating point operations per second) running on about 1.8 million Internet connected machines.

20 Another example of a distributed processing technique was developed and implemented by Distributed.net (URL in March 2000 -- [www.distributed.net](http://www.distributed.net)) to compete in encryption breaking contests. Distributed.net created and distributed a client software program which may be downloaded by client systems connected to the Internet. This client software then acts as part

of a large distributed processing system specifically designed to break encrypted messages on the Internet. Using this processing technique, Distributed.net has won encryption breaking contests sponsored by RSA Labs, which is an Internet security company. In these contests, RSA Labs has offered a monetary prize to the winner of the encryption contest. In organizing its efforts, Distributed.net has offered a share of this monetary prize to the client system that actually breaks the encryption code. In addition, Distributed.net keeps track of overall project statistics, as well as statistics concerning the efforts of its client systems through individual and team rankings by amount of processing completed.

Entropia.com (URL in March 2000 -- [www.entropia.com](http://www.entropia.com)) has utilized an Internet distributed processing system to compete in contests directed to identifying the largest prime number. Entropia.com also offers its computing power to other research projects. Users may sign on to be part of the distributed processing for free. For the largest prime number contest, Entropia.com, like Distributed.net, offers a monetary prize to the Internet connected PC that comes up with the first prime number achieved in a new order of magnitude. For other research projects, the incentive is simply to be a part of the research project.

Another distributing processing web site is provided by Process Tree Network (URL in March 2000 -- [www.processtree.com](http://www.processtree.com)). This web site is attempting to sign-up Internet connected computer systems to provide processing power for paying projects. For a project, each partner system, when connected to the Internet, will have client software that downloads a job unit and processes that job unit. The incentive offered by the Process Tree Network are "micro-payments" for the amount of work completed by any given system. These micro-payments are



apparently small amounts of some total project value based upon the amount of the project completed by the given system through the jobs it has processed. In addition, each partner is given a bonus percentage of payments made to persons they sign-up as new partners.

5 In completely unrelated Internet activities outside the distributed processing arena, there have been a number of sites that have utilized a sweepstakes model as an incentive for consumer behavior. One of the most popular (currently, as of March 2000) sweepstakes sites is IWON.COM (www.iwon.com) IWON.COM is a standard Internet search and content portal that provides an incentive to users by giving them entries to a sweepstakes when the users use the portal. The more the users use the portal, the more entries the user generates, up to a limit, for example, up to 100/day. Currently (as of March 2000), at the end of each day, IWON.COM has chosen a \$10,000 winner from among the entries. At the end of each month, IWON.COM has chosen a \$1,000,000 winner. And, at the end of the current sweeps period (as of March 2000), IWON.COM plans to draw a single winner for a \$10,000,000 grand prize. IWON.COM has created this sweepstakes model to introduce an Internet portal in late 1999 and make it a web site that has as a comparable number of people using it as does Internet portals that have existed for many years, such as, for example. Yahoo.com (URL in March 2000 – www.yahoo.com).

20 Significantly, these prior distributed processing projects have failed to fully utilize the capabilities of connected distributed devices.

## Summary of the Invention

The present invention provides a distributed back-up processing system and associated method that identifies the capabilities of distributed devices connected together through a wide variety of communication systems and networks and utilizes those capabilities to provide incentives to the distributed devices and to organize, manage and distribute project workloads to the distributed devices.

In one broad respect, the present invention is a method of distributing back-up data in a network, including providing a server system, coupling the server system to a network, the network being configured to be coupled to distributed devices, and utilizing the server system to distribute data back-up workloads across a plurality of the distributed devices.

In another broad respect, the present invention is a distributed back-up processing system, including a first system coupled to a network configured to be coupled to distributed devices, and a workload database coupled to the server system storing workloads for data back-up, the first system scheduling the data back-up workloads for the distributed devices to back-up data coupled to the network.

## Description of the Drawings

It is noted that the appended drawings illustrate only exemplary embodiments of the invention and are, therefore, not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

5

FIG. 1A is a block diagram for a distributed processing system having client capability and incentive features, according to the present invention.

FIG. 1B is a block diagram for information flow among customer systems, server systems and client systems, according to the present invention.

FIG. 2A is a block diagram for a client system, according to the present invention.

FIG. 2B is a block diagram for processing elements within a client system, according to the present invention.

FIG. 2C is a block diagram for a client system agent installed on a client system, according to the present invention.

FIG. 2D is an example user interface for a client system agent, including incentive advertising, according to the present invention.

FIG. 3A is a block diagram for server systems, according to the present invention, including a control system, a sweepstakes system and a workload database.

FIG. 3B is a block diagram for servers systems, customer systems, client systems and  
5 outsourced host systems, according to the present invention.

FIG. 3C is a block diagram for a server system processor, according to the present invention.

FIG. 3D is an alternative block diagram for a server system processor, according to the  
10 present invention.

FIG. 4 is a functional block diagram for an example sweepstakes incentive operation  
15 according to the present invention.

FIG. 5A is a block diagram for a distributed processing system for a network site  
indexing application, according to the present invention.

FIG. 5B is a functional block diagram for an indexing operation according to the present  
20 invention.

FIG. 6A is a block diagram for a server system according to the present invention, including a control system, a workload database, and a database of client capabilities balancing vectors.

5           FIG. 6B is a functional block diagram for client capabilities balancing of workloads according to the present invention.

FIG. 7A is a block diagram for a distributed processing system, according to the present invention, including example network sites on which site testing is to be conducted, such as load testing and/or quality-of-service (QoS) testing.

FIG. 7B is a functional block diagram for site-testing, according to the present invention.

FIG. 8 is a block diagram for a distributed processing system for a data backup application, according to the present invention.

## Detailed Description of the Invention

The present invention contemplates the identification of the capabilities of distributed devices connected together through a wide variety of communication systems and networks and the aggregation of these capabilities to accomplish processing, storage, broadcasting or any other desired project objective. For example, distributed devices connected to each other through the Internet, an intranet network, a wireless network, or any other network may provide any of a

number of useful capabilities to third parties once their respective capabilities are identified, organized, and managed for a desired task. These distributed devices may be connected personal computer systems (PCs), internet appliances, notebook computers, servers, storage devices, network attached storage (NAS) devices, wireless devices, hand-held devices, or any other computing device that has useful capabilities and is connected to a network in any manner. The present invention further contemplates providing an incentive, which may be based in part upon capabilities of the distributed devices, to encourage users and owners of the distributed devices to allow the capabilities of the distributed devices to be utilized in the distributed parallel processing system of the present invention.

The number of usable distributed devices contemplated by the present invention is preferably very large. Unlike a small local network environment, for example, as may be used by an Internet Service Provider (ISP), which may include less than 100 interconnected computers systems to perform the tasks required by the ISP, the present invention preferably utilizes a multitude of widely distributed devices to provide a massively distributed processing system. With respect to the present invention, a multitude of distributed devices refers to greater than 1,000 different distributed devices. With respect to the present invention, widely distributed devices refers to a group of interconnected devices of which at least two are physically located at least 100 miles apart. With respect to the present invention, a massively distributed processing system is one that utilizes a multitude of widely distributed devices. The Internet is an example of a interconnected system that includes a multitude of widely distributed devices. An intranet system at a large corporation is an example of an interconnected system that includes multitude of distributed devices, and if multiple corporate sites are involved, may include a multitude of

widely distributed devices. A distributed processing system according to the present invention that utilizes such a multitude of widely distributed devices, as are available on the Internet or in a large corporate intranet, is a massively distributed processing system according to the present invention.

5

FIG. 1A is a block diagram for a distributed parallel processing system 100 according to the present invention. The network 102 is shown having a cloud outline to indicate the unlimited and widely varying nature of the network and of attached client types. For example, the network 102 may be the Internet, an internal company intranet, a local area network (LAN), a wide area network (WAN), a wireless network, or any other system that connects together multiple systems and devices. In addition, network 102 may include any of these types of connectivity systems by themselves or in combination, for example, computer systems on a company intranet connected to computer systems on the Internet.

FIG. 1A also shows client systems 108, 110 ... 112 connected to the network 102 through communication links 118, 120 ... 122, respectively. In addition, server systems 104, other systems 106, and customer systems 152 are connected to the network 102 through communication links 114, 116 and 119, respectively. The client system capabilities block 124 is a subset of the server systems 104 and represents a determination of the capabilities of the client systems 108, 110 ... 112. The incentives block 126 is also a subset of the server systems 104 and represents an incentive provided to the users or owners of the clients systems 108, 110 ... 112 for allowing capabilities of the clients systems 108, 110 ... 112 to be utilized by the distributed processing system 100. The client systems 108, 110 and 112 represent any number of

systems and/or devices that may be identified, organized and utilized by the server systems 104 to accomplish a desired task, for example, personal computer systems (PCs), internet appliances, notebook computers, servers, storage devices, network attached storage (NAS) devices, wireless devices, hand-held devices, or any other computing device that has useful capabilities and is  
5 connected to a network in any manner. The server systems 104 represent any number of processing systems that provide the function of identifying, organizing and utilizing the client systems to achieve the desired tasks.

The incentives provided by the incentives block 126 may be any desired incentive. For example, the incentive may be a sweepstakes in which entries are given to client systems 108, 110 ... 112 that are signed up to be utilized by the distributed processing system 100. Other example incentives are reward systems, such as airline frequent-flyer miles, purchase credits and vouchers, payments of money, monetary prizes, property prizes, free trips, time-share rentals, cruises, or any other desired incentive or reward.

As indicated above, any number of other systems may also be connected to the network 102. The element 106, therefore, represents any number of a variety of other systems that may be connected to the network 102. The other systems 106 may include ISPs, web servers, university computer systems, and any other distributed device connected to the network 102, for  
20 example, personal computer systems (PCs), internet appliances, notebook computers, servers, storage devices, network attached storage (NAS) devices, wireless devices, hand-held devices, or any other connected computing device that has useful capabilities and is connected to a network in any manner. The customer systems 152 represents customers that have projects for the



distributed processing system, as further described with respect to FIG. 1B. The customer systems 152 connect to the network 102 through the communication link 119.

It is noted that the communication links 114, 116, 118, 119, 120 and 122 may allow for communication to occur, if desired, between any of the systems connected to the network 102. For example, client systems 108, 110 ... 112 may communicate directly with each other in peer-to-peer type communications. It is further noted that the communication links 114, 116, 118, 119, 120 and 122 may be any desired technique for connecting into any portion of the network 102, such as, Ethernet connections, wireless connections, ISDN connections, DSL connections, modem dial-up connections, cable modem connections, direct T1 or T3 connections, routers, portal computers, as well as any other network or communication connection. It is also noted that there are any number of possible configurations for the connections for network 102, according to the present invention. The client system 108 may be, for example, an individual personal computer located in someone's home and may be connected to the Internet through an Internet Service Provider (ISP). Client system 108 may also be a personal computer located on an employee's desk at a company, may be connected to an intranet through a network router, and may be connected to the Internet through a second router or portal computer. Client system 108 may further be personal computers connected to a company's intranet, and the server systems 104 may also be connected to that same intranet. In short, a wide variety of network environments are contemplated by the present invention on which a large number of potential client systems are connected.

FIG. 1B is a block diagram information flow 150 among customer systems 152, server systems 104 and client system 134, according to the present invention. The server systems 104, as discussed above, may include any number of different subsystems or components, as desired, including client system capabilities block 124 and incentives block 126. The server systems 104 send project and benchmark workloads 130 to client systems 134. A benchmark workload refers to a standard workload that may be used to determine the relative capabilities of the client systems 134. A project workload refers to a workload for a given project that is desired to be completed. The project workload may be, for example, a workload for projects such as network site content indexing, network site testing including network site load testing and network site quality of service testing, data back-up, bioinformatics including genetic and biological analyses, pair-wise comparisons including fingerprint and DNA analyses, data mining, or any other desired project.

Client systems 134, as discussed above, may be any number of different systems that are connected to the server systems 104 through a network 102, such as client systems 108, 110 ... 112 in FIG. 1A. The client systems 134 send results 132 back to the server systems 104 after the client systems 134 complete processing any given workload. Depending upon the workload project, the server systems 104 may then provide results 156 to customer systems 152. The customer systems 152 may be, for example, an entity that desires a given project to be undertaken, and if so, provides the project details and data 158 to the server systems 104.

FIG. 2A is a block diagram for an example client system 108 according to the present invention. In this simplified block diagram, an original workload 204 is received through line

208 from an interface 206. The original workload 204 represents a portion of the processing, storage or other activity required to complete the desired task for which the server system 104 is trying to accomplish. This original workload 204 is sent by the server system 104 through the network 102 and received by the client system 108 through communication link 118. The client  
5 system 108 processes the original workload 204. Following line 212, results 202 are then stored for transferring along line 210 to interface 206. Interface 206 may then communicate the results back to the server system 104 through communication line 118, or to other client systems (for example, with peering of client systems) and then through the network 102.

It is noted that the workload received by client system 108 and the processing or activity performed may depend up a variety of factors, as discussed further below. In part, this workload allocated by the server system 104 to each client system 108, 110 and 112 may depend upon the capabilities of the client system, such as the processing power, disk storage capacity, communications types, and other capabilities available from the various components of the  
15 systems within the client system 108.

The server systems 104 can select the workloads for the client system 108 and may control when these workloads are performed, through an operational code (i.e., an agent) residing and installed on the client system 108. Alternatively, the owner or user of the client system 108  
20 may determine when workloads are procured or obtained from the server systems 104, as well as when these workloads are performed, for example, by accessing the server systems 104 through the network 102. For example, the sever system 104 may download to the client system 108 upon request one or more workloads. At the same time, an agent residing on the client system

108 may operate to process the workload or multiple workloads downloaded to the client system 108. It is noted, therefore, that the agent may be simultaneously managing more than one workload for any number of projects. When the workload is complete, the agent may inform the owner or user of the client system 108 the results are ready to be communicated back. The client system 108 may then upload results to the server system 104 and download new workloads, if desired. Alternatively, these logistical and operational interactions may take place automatically through control of the agent and/or the server systems 104.

FIG. 2B is a block diagram for processing elements within a client system 108 according to the present invention. In this diagram, client system 108 is contemplated as a personal computer. In a personal computer, an internal bus 260 would typically have a variety of different devices connected to it. For example, a CPU 250 could be connected through the bus 260 to a video processor 252, a floating point processor 254 (often integrated within the CPU itself), and digital signal processors (DSPs), such as those found on sound cards and modems. In addition, any of a variety of other processing devices 258 may be included. Furthermore, other types of devices may be connected, such as hard drives 264, which provide disk storage capabilities, and a digital camera 262.

It is noted, therefore, that the capabilities for client systems 108, 110 ... 112 may span the entire range of possible computing, processing, storage and other subsystems or devices that are connected to a system connected to the network 102. For example, these subsystems or devices may include: central processing units (CPUs), digital signal processors (DSPs), graphics processing engines (GPEs), hard drives (HDs), memory (MEM), audio subsystems (ASs),

communications subsystems (CSs), removable media types (RMs), and other accessories with potentially useful unused capabilities (OAs). In short, for any given computer system connected to a network 102, there exists a variety of capabilities that may be utilized by that system to accomplish its direct tasks. At any given time, however, only a fraction of these capabilities are typically used on the client systems 108, 110 ... 112. The present invention can take advantage of these unused capabilities.

It is also noted that along with receiving the workload, the client system 108 will also receive an agent that manages the completion of the workload. This agent may be software that is customized for the particular computer system and processing capabilities of the client system 108. For example, if the client system is a personal computer as shown in FIG. 2B, the agent may be a program that operates in the background of the computer's operating system. When the agent determines that there is unused processing or other capabilities, the agent may take advantage of it. For example, if the user is using a word processing application to create a document, little processing power is being utilized by the word processing program, leaving the computer's CPU and video processor underutilized. Thus, the agent could execute commands to these processors during dead cycles. In this way, the agent may facilitate the completion of workload processing in a reduced time. In addition, this agent may be self-updating upon connecting to the server systems 104, so that the agent may be kept up to date with current software revisions and workload activities. It is also noted that the agent may manage work on multiple workloads at the same time, so that any given distributed device connected to the network 102 may be working on a plurality of workloads at any given time.

FIG. 2C is a block diagram for an example client system agent 270. The agent 270 may include a security subsystem 272 that controls the interface of the client system 108 with the agent 270. The security subsystem 272 may help keep the workloads secure and may help to keep the client systems 108 from suffering any security problems in completing the workload. For example, the agent 272 may operate to keep viruses from attacking the client system 108 while the client system 108 is processing the workload through the operation of the agent. The security subsystem 272, therefore, may provide the interface for the workloads 130 and the results 132.

The clients system agent 270 may also include a workload engine 274, a statistics / user interface / incentive advertising block 276, and a workload package and update processing block 278. In the example shown in FIG. 2C, workloads 130 pass through the security subsystem 272 and along line 280 to the workload package and update processing block 278. In this block 278, the agent 270 may be updated by the server systems 104. Alternatively, the agent 270 may determine, when connected to the server systems 104, whether it needs to be updated and then accomplish that updating automatically. Once the workload package is processed, the workload engine 274 may receive the workload following line 288. The workload engine 274 works on the workload, ultimately completing the workload. The results or status of the workload may then be sent through the security subsystem 272 following line 282. The results 132 may then be provided back to the server systems 104.

The statistics / user interface / incentive advertising block 276 may provide workload, incentive and other statistics, as well as any other desired interface features, to the user of the

client system. For example, the block 276 may show a user the expected amount of processing time it will take for the client system to complete a workload task based upon the capabilities of the system. As also shown, the block 276 may receive information following lines 286 and 284 from the workload package and update processing block 278 and from the workload engine 274.

5 If desired, security information from the security subsystem 272 could also be displayed to the user of the client system. It is noted that the information displayed to the user of the client system may be modified and selected as desired without departing from the present invention.

With respect to incentive advertising, the block 276 may also show the user of the client system how this processing time might change depending upon various possible upgrades to the capabilities of the client system, such as a faster microprocessor, more memory, more disk storage space, etc. Furthermore, the client system capabilities may be shown correlated to the incentives provided to the client system for participation. Thus, the user may be provided information as to how the user's incentives would increase or change depending upon other computer systems or upgraded capabilities the user could acquire. This incentive value increase may also be tied to upgrades to particular vendor's devices. For example, if the user's device is a computer system having an ABC microprocessor, the block 276 may provide the user information as to increased incentive values based upon an upgrade to a more powerful ABC microprocessor. Similarly, if the user's device is a computer system obtained from ABC, the  
20 block 276 may provide the user information as to increased incentive values based upon an upgrade to a more powerful ABC computer system.

FIG. 2D is a an example user interface 276 for a client system agent, including incentive advertising, according to the present invention. In the example shown, interface 276 is a window 230 that may be displayed on a distributed device, for example, a computer system. This window 230 displays the desired information for the agent client manager. As indicated above, this agent client manager is initially downloaded from the server systems 104 and thereafter may be updated at various times when the client system is communicating with the server systems. The interface 276, as shown, includes interface tabs 221, 222, 224, 226, 228, 244, 246 and 248. These interface tabs may be selected through the user of a pointing device or keyboard attached, for example, to a computer system graphically displaying the window 230. It is noted that the interface tabs 221, 222, 224, 226, 228, 244, 246 and 248 are only examples, and the number, arrangement and content of tabs may be modified as desired. In addition, the example user interface 276 depicted in FIG. 2D is only an example and may be modified as desired.

In FIG. 2D, the processor values interface tab 224 is the one currently selected by the user. This tab 224 (Processor Values) includes example information that may be displayed to the user. Assuming that a workload is being processed by the agent client manager, the user may select the button 242 (Show My Incentive Values) to show the user's current incentive values associated with the workload being performed. The personal incentive values chart 232 (My Personal Incentive Values) may then be displayed to the user. As shown, the incentive values are provided in a relative scale from 1 to 10. The key designation 240 represents the incentives associated with the users current central processing unit (CPU) or microprocessor.



As indicated above, this incentive information may also be tied to the specific vendor of the user's CPU, for example, ABC Company's CPU. Thus, as shown, the key designation 240 (My current processor) and the corresponding bar graph portion 236 represent incentives for the user's current CPU (e.g., a 166 MHz processor). The key designation 238 represents the incentives that the user is projected to have if the user were to upgrade the CPU. Again, this upgrade incentive information may be tied to the specific vendor of the user's CPU or to any other vendor, if desired. Thus, as shown, the key designation 238 (NEW ABC 1GHz processor!) and the corresponding bar graph portion 234 represent incentives for an upgrade to a new ABC CPU (e.g., a new ABC 1 GHz processor). In this manner, a user may be provided an incentive to increase the capabilities of the distributed device, and a vendor may be provided advertising so that the user is also directed to a particular upgrade.

Looking further to FIG. 2D, other similar incentive related information tabs may be provided for any desired capability of the distributed device. For example, tab 246 (Memory Values) represents information that may be provided for the memory capabilities of the distributed device. Tab 224 (Graphics Values) represents information that may be provided for the graphics capabilities of the distributed device. Tab 226 (Communications Values) represents information that may be provided for the communication capabilities of the distributed device. Tab 228 (Storage Values) represents information that may be provided for the storage capabilities of the distributed device. Tab 248 (System Values) represents information that may be provided for the system capabilities as a whole for the distributed device.

In addition to these incentive related information tabs, other tabs may be included to provide information and control for any desired features of the agent client manager. For example, the tab 244 (Current: Prime Search) represents information that may be displayed to the user about the current workload being performed by the agent client manager, for example, a search for large prime numbers. The tab 221 (Settings) represents information that may be displayed to the user about various settings for the client agent manager. In particular, the tab 221 may provide the user the ability to control any desired aspect of the operation of the agent client manager. For example, the user may be able to select a portion of the capabilities that may be utilized (e.g., a maximum of 20% of the system memory), the types of workloads that may be performed (e.g., only scientific research projects), the times when the agent may utilize system resources (e.g., only between 12 to 6 am, or only when the system is idle), or any other desired operational feature. It is noted that in addition to upgrade incentive information indicated above, the user may also be provided information as to how incentives would increase if the user allocated or changed the settings for the agent client manager.

Now looking to FIG. 3A, the server systems 104 may be one or more computer systems that operate to identify client system capabilities, organize workloads, and utilize client systems to accomplish a desired task. The server systems 104 includes a control system 304 a workload database 308, and a sweepstakes system 306, as discussed more below. The workload database 308 stores any desired project task, which may be broken up into discrete workload tasks WL1, WL2 ... WLN, as represented by elements 336, 338 ... 340. The workload database may also store one or more benchmark workloads (BWL) 335 that may be utilized to determine client system capabilities in response to a standard workload. Through line 312, the workload database

308 communicates with control system 304. Control system 304, for example, receives original workload 322 and transfers it to the interface 320 through line 330. The interface 320 then transfers the workload 322 to the network 102 through line 114. This workload 322 is ultimately received as workload 204 by client system 108, 110 or 112, as shown in FIG. 2A. The result 324 is ultimately received by the control system 304 through interface 320 and line 328.

In allocating workloads, the control system 304 may consider the capabilities of the client systems 108, 110 and 112 to which the control system 304 is sending workloads. For example, if client 108 has more processing power than client 110, the control system 304 may allocate and send more difficult or larger workloads. Thus, client 108 may receive WL1 336 and WL2 338, while client 110 would only receive WL3. Alternatively, the workload database 308 could be organized with differing levels of processing power or capability requirements for each workload. In this way, WL1 336 may represent a greater processing or system capability requirement than WL2 338. It should be noted that workload may be a processing task, a data storage task, or tied to any other of a variety of capabilities that may be utilized on the client systems 108, 110 ... 112.

As indicated above, to encourage owners or users of client systems to allow their system capabilities to be utilized by control system 104, an incentive system may be utilized. This incentive system may be designed as desired. Incentives may be provided to the user or owner of the clients systems when the client system is signed-up to participate in the distributed processing system, when the client system completes a workload for the distributed processing system, or any other time during the process. In addition, incentives may be based upon the

capabilities of the client systems, based upon a benchmark workload that provides a standardized assessment of the capabilities of the client systems, or based upon any other desired criteria.

One example use of a benchmark workload is to use the benchmark workload to  
5 determine incentive values. For example, the server systems 104 may be designed to send out a standard benchmark workload once an hour to each client system 108, 110 ... 112. If a client system is not available at that time for any reason, the workload would not be completed by the client system, and there would be no incentive value generated for that client system. In this example, the benchmark workload may be a timed work-set that would exercise each subsystem with capabilities within the client system that was desired to be measured. A more capable client system would then generate greater incentive values from executing the benchmark workload, as compared to a lesser capable client system. These incentive values may be utilized as desired to determine what the client system should get in return for its efforts. For example, if the incentive were a sweepstakes as discussed further below, the number of entries in the sweepstakes may be  
10 tied to the system's performance of the benchmark workload. Thus, the faster or better the client system performs the benchmark workload, the more entries the client system would receive.

In the embodiment shown in FIG. 3A, the server systems 104 includes a sweepstakes  
system 306 that functions with control system 304 to provide incentives for the users or owners  
20 of client systems 108, 110 and 112 to allow their system capabilities to be used by the server systems 104. The control system 304 may determine a sweepstakes entry value 302 that is sent along line 310 to the sweepstakes system 306. The sweepstakes system 306 may then receive sweepstakes entry 332 and provide it to the sweepstakes engine 330 through line 334. The

sweepstakes engine 330 may process the entries and determine a winner, when desired. In the embodiment shown, therefore, entries to the sweepstakes may be generated each time a unit of work is accomplished by one or more of the subsystems within a client system 108, 110 or 112 via an agent installed on the device for the purposes of managing and completing units of work.

5 The total entries for any period of time would, therefore, be dynamic depending on how many are received. Odds of winning would then be determined by the total number of entries received and the total number of entries contributable to any given entrant.

FIG. 3B is another example block diagram of a distributed processing system 300 including servers systems 104, customer systems 152, client systems 134 and out-sourced host systems 340, according to the present invention. The servers systems 104 may include an analytic subsystem 346, a results/workload production subsystem 344, a project pre-processing subsystem 342, a client agent subsystem 243, and an incentive advertising subsystem 245. The incentive advertising subsystem 245 may operate to provide advertising information, for example, the upgrade incentive information as discussed with respect to FIG. 2D. The client agent subsystem 243 may operate to download an agent to the client systems 134 and to update this agent at times when the server systems 104 are communicating with the client systems 134.

The customer systems 152, which represent customers that have projects that they desired to be processed by the distributed processing system, may be connected to the project pre-processing subsystem 342 to provide projects to the servers systems 104. These projects are processed by the project pre-processing subsystem 342 and passed to the results/workloads production subsystem 344, which produces and sends out workloads 130 and receives back

results 130. The analytic system 346 then takes the results and processes them as desired. Completed project information may then be provided from the analytic system 346 to the customer systems 152. In this manner, the projects of the customer systems 152 may be processed and project results reported by the distributed processing system of the present invention.

Also, as shown, the workloads 130 and the results 132, or other tasks of the server systems 104, may be processed and handled by out-sourced host systems 340, if desired. Thus, some or all of the workloads 130 may be sent first to out-sourced host systems 340. Out-sourced host systems 340 then send workloads 130A to the client systems 134 and receive back results 132A. The out-sourced host systems 340 then send the results 132 back to the server systems 104. It is noted that this out-sourcing of server system tasks may be implemented as desired for any given task that the server systems 104 may have. It is further noted that, if desired, the server systems 104 may perform all of the desired functions of the server systems 104 so that no out-sourced host systems 340 would be used.

FIG. 3C is a block diagram for one embodiment of a server system processor 350, according to the present invention. An agent abstraction layer 360 may send workloads 130 and receive results 132. The security subsystem 354 may interact with the agent abstraction layer 360 and provide information to a data parser 352 and an application programming interface (APIs) block 356. The APIs block 356, the data parser 352 and a workload manager 558 may interact to accomplish the desired tasks for the server system processor 350. It is noted that for this embodiment, the API protocol could be controlled and provided to other host systems.

FIG. 3D is an alternative block diagram for a server system processor 350, according to the present invention. In this embodiment, the APIs block 356 and the agent abstraction layer 360 are not present. The data parser 352, the workload manager 358 and the security subsystem 354 interact to provide the desired server system tasks. It is noted that for this embodiment, the security subsystem is controlled and utilized for communicating with client systems.

FIG. 4 is a functional block diagram for a sweepstakes operation 400 by the system server 104 according to the present invention. In block 402, the server systems 104 may sign-up client systems in “accept clients” block 402. Following line 418, the server systems 104 identifies the capabilities of the client’s computer and processing systems in the “determine client system capabilities” block 404. Control passes along line 420 to the “distribute workloads to client systems” block 406, where the server systems 104 allocates workloads to each client system 108, 110 and 112. This workload may also be an benchmark workload, as indicated above, that acts as an entry workload to determine the entries or entry values for the client system. As also indicated above, in distributing the workloads in block 406, the server system 104 may take into consideration the capabilities of the client systems to which workloads are being distributed. The client systems 108, 110 and 112 then operate to complete the workloads allocated to them. The server system 104 receives back workload results in “receive workload results” block 408.

At this point, control passes along line 424 to the “determine sweepstakes entries” block 410. In this block 410, the server system 104 determines the entry value for the workload completed or for a standard benchmark or entry workload completed. This entry value may be

weighted upon a variety of factors including factors such as the amount of work completed, the difficulty level of the processing required, and the accuracy of the results. It is noted that any desired weighting may be utilized. Thus, it is understood that a wide variety of considerations may be utilized to determine the entry value weighting for the sweepstakes.

5

Although the weighting determination is shown in block 410 in FIG. 4, the entry value may also be determined, in whole or in part, when a client system signs on to the distributed processing distributed system of the present invention. For example, if a client system has state-of-the-art CPU, video processor, DSP engine, memory, and large amounts of free disk storage space, a high entry value may be allocated to this client system up-front. In contrast, a client system that has a slow CPU, a weak video processor, no DSP engine, little memory, and little free disk storage space may be allocated a small entry value. In this way, the owners or users of the client systems may be provided immediate feedback as to the potential sweepstakes entry value of their computer systems, devices and system capabilities.

It is further noted that the entry value may take any desired form and may be, for example, a multiplier that will be used for each unit of workload completed. In this way, the owner or user will readily be cognizant that a state-of-the-art system will yield a high multiplier, where as an older system, system capability or device will yield a low multiplier. Such feedback, whether communicated to the owner or user immediately upon signing up or upon completion of each workload, will create an incentive for owners and/or users to acquire state-of-the-art systems, thereby further increasing the potential processing power of the distributed processing system of the present invention.



In addition, different workload projects may be designated with different entry values, as well. For example, some workload projects may require particular hardware or software processing systems within a client system or device. Thus, the number of client systems that are capable of performing the task would be limited. To further encourage participation by those owners or users with capable systems, the entry value for taking on particular workloads and/or systems with the desired features may be allocated higher entry values.

Referring back to FIG. 4, control passes along line 426 to the "process entries" block 412. In this block 412, the sweepstakes entries are processed and stored as desired. Following line 428, "end of entry period" decision block 414 represents a determination of whether the time for getting entries into the sweepstakes has ended. If not, the control continues to line 430 and back to blocks 402, 404 and/or 406, depending upon what is desired. Once the entry period has ended, control flows along line 432 to "determine winners" block 416. The server system 104 then identifies from among the entries, who the winning client system or systems will be.

The entry period may be any desired time frame and may include multiple overlapping time frames, as desired. For example, winners may be determined daily for entries each day, monthly for entries within a month, and/or yearly for entries within one year. In addition, special entry periods may be generated, if desired, for example where a particularly important workload project had a short time frame in which it needed to be completed.

FIGS. 1, 2A-C, 3A-D, and 4 are directed to example embodiments for a distributed processing system according to the present invention, including a sweepstakes reward or incentive feature, as shown in the embodiments of FIG. 3A and FIG. 4. FIGS. 6A and 6B further describe a capabilities scheduling feature, in which the server systems 104 may identify and consider any of a variety of client system capability vectors in determining how to organize, allocate and manage workloads and projects. FIGS. 5A and 5B describe a distributed processing system and workload project that accomplishes network site indexing. FIGS. 7A and 7B describe a distributed processing system and a workload project that accomplishes network site testing, such as quality of service (QoS) testing and load testing. And FIG. 8 describes a distributed processing system, preferably with respect to a corporate intranet, that accomplishes distributed data back-up.

FIG. 5A is a block diagram for a distributed processing system 550 for a network site indexing application, according to the present invention. As stated above with respect to FIG. 1A, the network 102 may be a wide variety of networks. For this network site indexing application, the network 102 may preferably be the Internet having a multitude of network sites 552 ... 554. Each network site 552 ... 554 may have a variety of different content types that may be indexed, ranging from complex sites to relatively simple sites. For example, network site 552 includes text 570A, images 570B, audio streams 570C, video streams 570D, files 570E and other content 570F. Network site 554 is less complex and includes text 572A, images 572B, and other content 572C. Both network sites 552 and 554 are connected to the network 102 through communication lines 558 and 556, respectively.

As discussed above, the server systems 104 manage workloads for the client systems 108, 110 ... 112. The client systems 108, 110 ... 112 process these workloads and produce indexing results. The resulting index may be stored at a centrally managed site, such as central index storage block 560, or may itself be distributed over the possibly millions of indexing clients 108, 110 ... 112, as shown by remote index storage blocks 562, 564 ... 566. If remote index storage is utilized, a master database content index may be stored locally, for example, in the central index storage block 560. This content index may then direct relevant searches to the distributed massively parallel engine for search queries.

Referring now to FIG. 5B, a functional block diagram is shown for a network site indexing operation 500 according to the present invention. As described in FIG. 1 with respect to other systems 106, there may be any number of computer and processing systems connected to the network 102. Any one of these others systems 106 may publish information on the network 102 for access by any other system connected to the network 102. This information to be indexed may take a wide variety of forms, including, for example, text, images, audio streams, video streams, databases, spreadsheets, PDF files, Shockwave data, Flash data, applications, data files, chat streams, or any other information, data or data streams that may be accessible on a network site. The distributed processing system of the present invention may have as a workload the task of indexing this potentially massive amount of information.

For example, where the network 102 is the Internet or a large intranet, a large amount of processing power and time is needed to create an accurate, complete and up-to-date index of the information. The Internet uses an IP (Internet Protocol) address protocol to direct traffic around

the Internet. The IP address is the address of a computer attached to a TCP/IP (Transmission Control Protocol/Internet Protocol) network. Every system on the network must have a unique IP address. IP addresses are typically written as four sets of numbers separated by periods. The TCP/IP packet uses 32 bits to contain the IP address, which is made up of a network and host address (NETID and HOSTID). The more bits used for network address, the fewer remain for hosts. Web pages within a particular web site with a unique address may be addressed through URLs (Uniform Resource Locator) associated with that web site. In short, there is a limited, but very large, number of possible IP addresses for uniquely identifiable Internet sites that may be accessed and analyzed to generate an index of Internet sites and web pages via URLs.

The operation diagram of FIG. 5B starts with the “clients receive indexing workloads” block 502. In this block, the system server 104 provides the clients systems 108, 110 ... 112 with a workload task to index a portion of the information accessible on the network 102. For example, with the Internet, each workload may be single IP address or groups of URLs or, in some cases, large data types contained on single sites or pages. Following line 514, the “clients interact with other systems” block 504 represents the operation of the agent installed on the client systems 108, 110 ... 112 to access the network sites, according to the assigned workload, and index the information accessible on that site. This indexing may include all types of information accessible on that site, including text, audio, image, video, etc.

Next, following lines 516 and 518, the client systems 108, 110 and 112 complete the workload tasks, get the results ready for transmission, and sends those results back to the system server 104 in “clients complete workload” block 506 and “indexing results sent to server system”

block 508. Control passes along line 520 to “index compiled for use” block 510 where the server system formats and/or compiles the results for use. For example, the index results may be utilized for accurate, complete and up-to-date search information for the network 102. As indicated with respect to FIG. 5A, the resulting index may be stored remotely or locally following line 522. Thus, element 524 represents remote storage of the index, and element 526 represents central storage of the index. It is noted that the index may also be stored with a mixture of central and remote storage, as desired. In addition, as indicated above, a directory or summary index for the resulting index may be generated and stored centrally, if desired.

FIG. 6A is a block diagram for a server system 104 according to the present invention, including a control system 304, a workload database 308, and a database of capability vectors 620. The workload database 308 includes a variety of sets of workload projects WL1, WL2 ... WLN. For each workload project, there may be multiple workload units. For example, workload project WL1 includes workload units WL11, WL12 ... WL1N, as represented by elements 640, 642 ... 644, respectively. Similarly, workload project WL2 includes workload units WL21, WL22 ... WL2N, as represented by elements 646, 648 ... 650, respectively workload project WL3 includes workload units WL31, WL32 ... WL3N, as represented by elements 652, 654 ... 656, respectively.

It may be expected that different workload projects WL1, WL2 ... WLN within the workload database 308 may require widely varying processing requirements. Thus, in order to better direct resources to workload projects, the server system may access various system vectors when a client system signs up to provide processing time and other system or device capabilities

to the server system. This capability scheduling helps facilitate project operation and completion. In this respect, the capability vector database 620 keeps track of any desired feature of client systems or devices in capability vectors CBV1, CBV2 ... CBN, represented by elements 628, 630 ... 632, respectively. These capability vectors may then be utilized by the control system 304 through line 626 to capability balance workloads.

This capability scheduling according to the present invention, therefore, allows for the efficient management of the distributed processing system of the present invention. This capability scheduling and distribution will help maximize throughput, deliver timely responses for sensitive workloads, calculate redundancy factors when necessary, and in general, help optimize the distributed processing computing system of the present invention. The following TABLE 1 provides lists of capability vectors or factors that may be utilized. It is noted that this list is an example list, and any number of vectors or factors may be identified and utilized, as desired.

TABLE 1 -- Example Client Capability Vectors or Factors

1. BIOS Support:	a. BIOS Type (brand)
b. ACPI	c. S1, S2, S3, and S4 sleep/wake states
d. D1, D2 and D3 ACPI device states	e. Remote Wake Up Via Modem
f. Remote Wake Up Via Network	g. CPU Clock control
h. Thermal Management control	i. Docked/Undocked state control
j. APM 1.2 support	k. Hotkey support

l. Resume on Alarm, Modem Ring and LAN	m. Password Protected Resume from Suspend
n. Full-On power mode	o. APM / Hardware Doze mode
p. Stand-by mode	q. Suspend to DRAM mode
r. Video Logic Power Down	s. HDD, FDD and FDC Power Down
t. Sound Chip Power Down	u. Super I/O Chip Power Down
2. CPU Support:	a. CPU Type (brand)
b. MMX instruction set	c. SIMD instruction set
d. WNI instruction set	e. 3DNow instruction set
f. Other processor dependent instruction set(s)	g. Raw integer performance
h. Raw FPU performance	i. CPU L1 data cache size
j. CPU L1 instruction cache size	k. CPU L2 cache size
l. CPU speed (MHz/GHz...)	m. System bus (MHz/GHz...) speed supported
n. Processor Serial Number	o. CUID
3. Graphic Support	a. Graphics type (brand)
b. # of graphics engines	c. Memory capacity
d. OpenGL support	e. Direct3D/DirectX support
f. Color depth supported	g. MPEG 1/II decode assist
h. MPEG1/II encode assist	i. OS support
j. Rendering type(s) supported	k. Single-Pass Multitexturing support
l. True Color Rendering	m. Triangle Setup Engine
n. Texture Cache	o. Bilinear/Trilinear Filtering
p. Anti-aliasing support	q. Texture Compositing
r. Texture Decompression	s. Perspectively Correct Texture Mapping





7. Memory	a. Type of memory error correction (none, ECC, etc.)
b. Type of memory supported (EDO, SDRAM, RDRAM, etc.)	c. Amount of total memory
d. Amount of free memory	e. Current virtual memory size
f. Total available virtual memory size	
8. Operating System	a. Type of operating system (brand)
b. Version of operating system	c. Health of operating system

FIG. 6B is a functional block diagram for capabilities determination and scheduling operation 600 for workloads in a distributed processing system according to the present invention. Initially, various vectors are identified for which capability information is desired in the “identify client system capability vectors” block 602. Following line 612, the server systems 104 then capability balances workloads among client systems 108, 110 and 112 based upon the capability vectors in the “capability scheduling workloads based on vectors” block 604. Then the capabilities scheduled workloads are sent to the client systems 104 for processing in the “send capability scheduled workloads” block 606.

FIG. 7A is a block diagram for a network 102 according to the present invention, including example network sites 106A and 106B on which site testing is to be conducted, such as load testing and/or quality-of-service (QoS) testing. FIG. 7A is similar to FIG. 1 except that other systems 106 in FIG. 1 has been represented in the embodiment of FIG. 7A with network sites 106A and 106B. Communication line 116A between the network 102 and the network site

106A represents a interaction by one client system 108, 110 and 112. Communication lines 116B, 116C and 116D represent interactions by more than one client system 108, 110 and 112.

Site testing is typically desired to determine how a site or connected service performs under any desired set of test circumstances. With the distributed processing system of the present invention, site performance testing may be conducted using any number of real client systems 108, 110 and 112, rather than simulated activity that is currently available. Several tests that are commonly desired are site load tests and quality of service (QoS) tests. Quality of service (QoS) testing refers to testing a user's experience accessing a network site under normal usability situations. Load testing refers to testing what a particular network site's infrastructure can handle in user interactions. An extreme version of load testing is a denial-of-service attack, where a system or group of systems intentionally attempt to overload and shut-down a network site. Advantageously, the current invention will have actual systems testing network web sites, as opposed to simulated tests for which others in the industry are capable.

Network site 106B and the multiple interactions represented by communication lines 116A, 116B and 116C are intended to represent a load testing environment. Network site 106A and the single interaction 116A is indicative of a user interaction or QoS testing environment. It is noted that load testing, QoS testing and any other site testing may be conducted with any number of interactions from client systems desired, and the timing of those interactions may be manipulated and controlled to achieve any desired testing parameters. It is further noted that periodically new load and breakdown statistics will be provided for capacity planning.

FIG. 7B is a functional block diagram for a site-testing operation 700 according to the present invention. Initially, client systems 108, 110 and 112 receive workloads that identify testing procedures and parameters in the “clients receive testing workload” block 702. Following line 714, the client systems 108, 110 and 112 access the site being tested and perform the testing in block “clients interact with other systems” block 704. Next, following lines 716 and 718, the client systems 108, 110 and 112 complete the site testing workload tasks, get the results ready for transmission, and send those results back to the system server 104 in “clients complete testing workload” block 706 and “site testing results sent to server system” block 708. Control passes along line 720 to “site testing results compiled for use” block 510 where the server system formats and/or compiles the results for use by the network site. For example, the site testing results may be utilized determining modifications that need to be made to the network site to handle peak volume activities.

FIG. 8 is a block diagram for a distributed processing system 800 for a data back-up system application, according to the present invention. As stated above with respect to FIG. 1A, the network 102 may be a wide variety of networks, including an intranet network. Intranet networks, such as internal networks set up by corporations, are particularly suited for this application because the systems holding the data being backed-up would be owned by the same entity owning other systems with excess data storage capabilities. In this way, security would not be as great of an issue and the client system types could be better controlled. It is noted, however, that this data back-up application would be equally applicable to other networks, such as for computer systems connected through the Internet.

Referring back to FIG. 8, client systems 108, 110 ... 112 are shown each having a back-up data blocks 804, 806 ... 808. Customer systems 152 is shown as having data 802, which is desired to be backed-up with the distributed back-up system 800. The server systems 104 manage the flow of data from the data 802 and the client systems that have extra storage space represented by back-up data blocks 804, 806 ... 808. In operation, the server systems 104 identifies client system storage capabilities. With this information, the server systems 104 can receive data for back-up from any system on the network 102. It is noted, and as indicated with respect to FIG. 1A, the client systems 108, 110 ... 112 and the customer systems 152 may communicate directly with each other in peer-to-peer type communications.

The servers systems 104 may also manage the storage and transfer of data so that the data will be readily retrievable once backed-up and stored on the client systems 108, 110 ... 112. If desired, an summary index or directory of the backed-up data may be stored centrally on the server systems 104, or may be stored remotely on the client systems 108, 110 ... 112. It is also noted that the server systems 104 may also distribute data back-up workloads so that each portion of the data 802 is stored redundantly on at least two of the client systems 108, 110 ... 112. This redundancy provides added security should any one or more client systems suddenly cease to be operational.

Further modifications and alternative embodiments of this invention will be apparent to those skilled in the art in view of this description. It will be recognized, therefore, that the present invention is not limited by these example arrangements. Accordingly, this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the

manner of carrying out the invention. It is to be understood that the forms of the invention herein shown and described are to be taken as the presently preferred embodiments. Various changes may be made in the shape, size and arrangement of parts. For example, equivalent elements may be substituted for those illustrated and described herein, and certain features of the invention may  
5 be utilized independently of the use of other features, all as would be apparent to one skilled in the art after having the benefit of this description of the invention.

## Claims

I claim:

1. A method of distributing back-up data in a network, comprising:  
5 providing a server system;  
coupling the server system to a network, the network being configured to be coupled to  
distributed devices; and  
utilizing the server system to distribute data back-up workloads across a plurality of the  
distributed devices.
2. The method of claim 1, wherein the network comprises an internet or an intranet.
3. The method of claim 1, wherein the network comprises a wireless network.
4. The method of claim 3, wherein the distributed devices comprise computer systems  
5 having excess file storage capacity.
5. The method of claim 4, wherein the back-up data workloads include redundant workloads  
so that any given portion of the back-up data is stored on at least two different computer systems.
- 20 6. The method of claim 3, further comprising identifying at least one workload capability  
for a plurality of the distributed devices and utilizing the identified at least one workload  
capability to schedule back-up data workloads for the distributed devices.

7. The method of claim 1, wherein the utilizing step further comprises forming a resulting index stored on the server system.

5 8. The method of claim 1, further comprising providing an incentive to couple the distributed devices to the server system through the network so that the distributed devices are capable of performing a portion of the data back-up workload.

9. The method of claim 8, wherein the incentive comprises entries in a sweepstakes.

10. The method of claim 1, further comprising identifying at least one workload capability for a plurality of the distributed devices and utilizing the identified at least one workload capability to schedule data back-up workloads for the distributed devices.

11. The method of claim 10, wherein the workload capability is excess file storage capacity.

12. The method of claim 11, wherein the network is an intranet.

13. The method of claim 1, further comprising transferring an agent to the distributed  
20 devices, the agent being capable of managing the data back-up workload.

14. A distributed back-up processing system, comprising:  
a first system coupled to a network, the network being configured to be coupled to  
distributed devices; and  
a workload database coupled to the server system storing workloads for data back-up, the  
first system scheduling the data back-up workloads for the distributed devices to  
back-up data coupled to the network.

15. The system of claim 14, wherein the network comprises an internet or an intranet.

16. The system of claim 14, wherein the network comprises a wireless network.

17. The system of claim 14, wherein the distributed devices comprise computer systems  
having excess file storage capacity.

18. The system of claim 17, wherein the back-up data workloads include redundant  
workloads so that any given portion of the back-up data is stored on at least two different  
computer systems.

19. The system of claim 14, further comprising a capabilities database coupled to the first  
system storing workload capabilities for a plurality of the distributed devices, the first system  
utilizing the workload capabilities to schedule data back-up workloads for the distributed  
devices.



20. The system of claim 14, further comprising an incentive database coupled to the first system storing incentive values for a plurality of the distributed devices, the incentive values being provided to couple the distributed devices to the server system through the network so that the distributed devices are capable of performing a portion of the data back-up workload.

5

21. The system of claim 20, wherein the incentive comprises entries in a sweepstakes.

22. The system of claim 20, further comprising a capabilities database coupled to the first system storing workload capabilities for a plurality of the distributed devices, the first system utilizing the workload capabilities to schedule data back-up workloads for the distributed devices.


23. The system of claim 10, wherein the network is an intranet.

24. The system of claim 14, further comprising transferring an agent to the distributed devices, the agent being capable of managing the data back-up workload.

## **Abstract of the Disclosure**

A distributed back-up processing system and associated method are disclosed that identifies the capabilities of distributed devices connected together through a wide variety of communication systems and networks and utilizes those capabilities to provide incentives to the distributed devices and to organize, manage and distribute project workloads to the distributed devices.

FIG. 1A

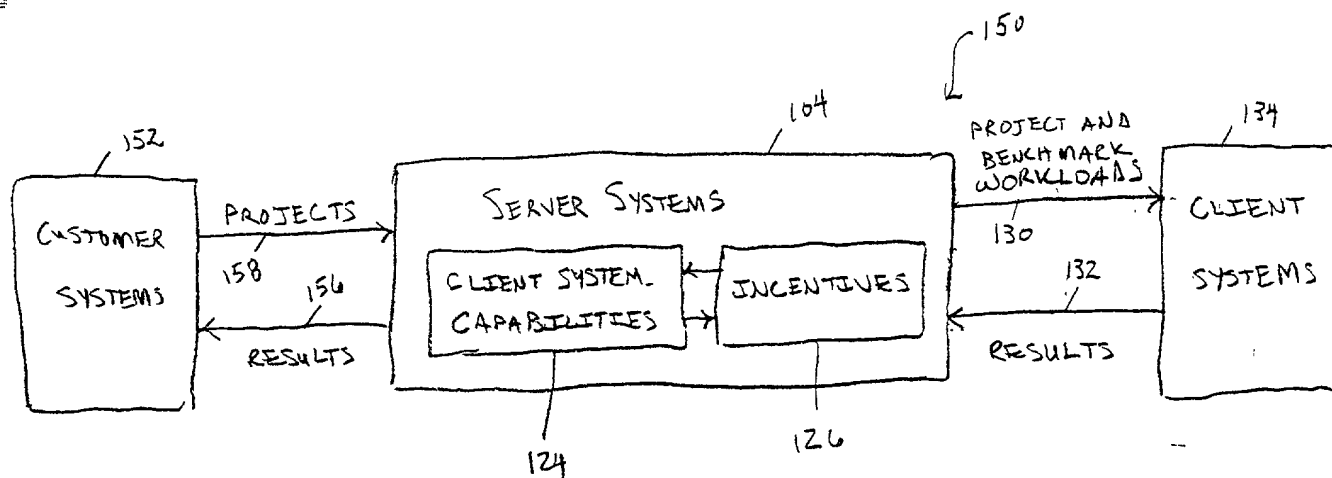





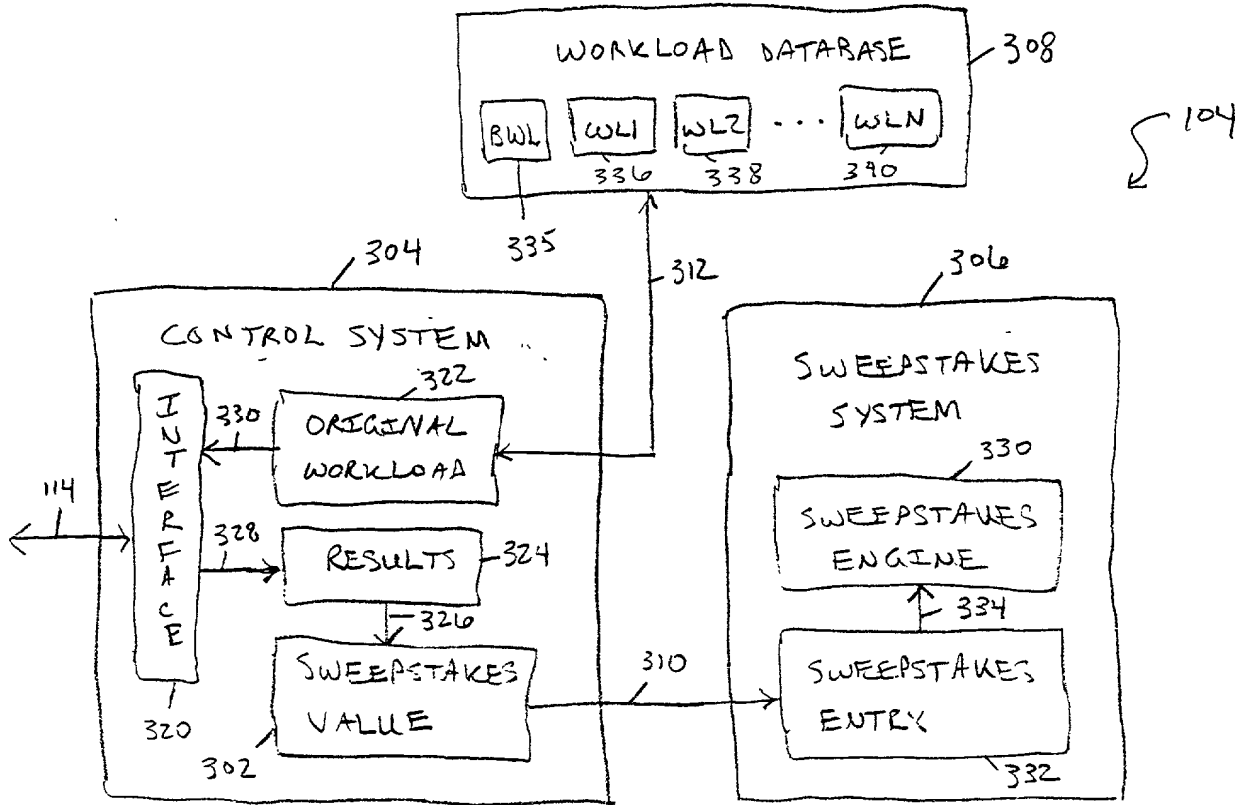


FIG. 3A

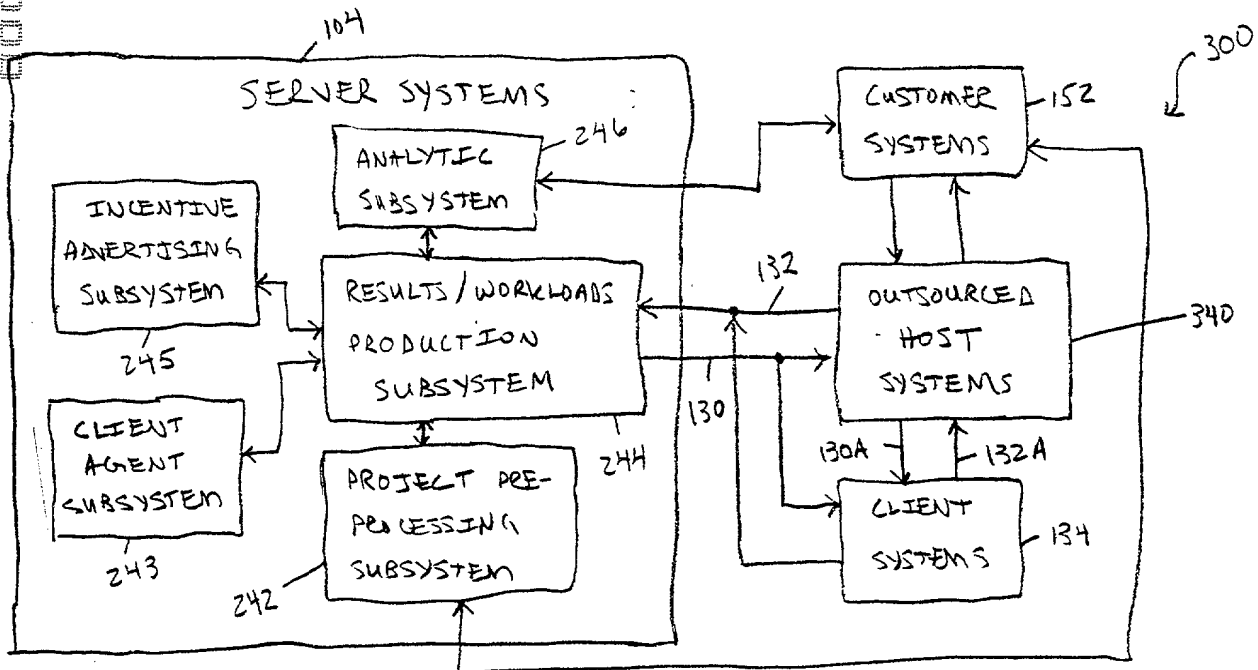


FIG. 3B

Parameter	Unit	Value	Unit	Value	Unit	Value	Unit	Value
Temperature	°C	25.0	°C	25.0	°C	25.0	°C	25.0
Humidity	%	50.0	%	50.0	%	50.0	%	50.0
Light intensity	μmol photons m <sup>-2</sup> s <sup>-1</sup>	100.0	μmol photons m <sup>-2</sup> s <sup>-1</sup>	100.0	μmol photons m <sup>-2</sup> s <sup>-1</sup>	100.0	μmol photons m <sup>-2</sup> s <sup>-1</sup>	100.0
CO <sub>2</sub> concentration	ppm	400.0	ppm	400.0	ppm	400.0	ppm	400.0
Water potential	MPa	-0.1	MPa	-0.1	MPa	-0.1	MPa	-0.1
Stomatal conductance	mol m <sup>-2</sup> s <sup>-1</sup>	0.1	mol m <sup>-2</sup> s <sup>-1</sup>	0.1	mol m <sup>-2</sup> s <sup>-1</sup>	0.1	mol m <sup>-2</sup> s <sup>-1</sup>	0.1
Transpiration rate	mmol m <sup>-2</sup> s <sup>-1</sup>	0.1	mmol m <sup>-2</sup> s <sup>-1</sup>	0.1	mmol m <sup>-2</sup> s <sup>-1</sup>	0.1	mmol m <sup>-2</sup> s <sup>-1</sup>	0.1
Net photosynthesis rate	μmol CO <sub>2</sub> m <sup>-2</sup> s <sup>-1</sup>	1.0	μmol CO <sub>2</sub> m <sup>-2</sup> s <sup>-1</sup>	1.0	μmol CO <sub>2</sub> m <sup>-2</sup> s <sup>-1</sup>	1.0	μmol CO <sub>2</sub> m <sup>-2</sup> s <sup>-1</sup>	1.0
Chlorophyll content	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0
Protein content	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0
Carbohydrate content	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0	mg g <sup>-1</sup>	1.0
Antioxidant activity	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0
Gene expression	fold change	1.0	fold change	1.0	fold change	1.0	fold change	1.0
Enzyme activity	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0	U g <sup>-1</sup>	1.0
Cell wall thickness	μm	1.0	μm	1.0	μm	1.0	μm	1.0
Cell wall composition	%	1.0	%	1.0	%	1.0	%	1.0
Cell wall strength	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall permeability	μm s <sup>-1</sup>	1.0	μm s <sup>-1</sup>	1.0	μm s <sup>-1</sup>	1.0	μm s <sup>-1</sup>	1.0
Cell wall elasticity	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall flexibility	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall durability	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall resistance	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall toughness	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall strength	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall flexibility	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall durability	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall resistance	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall toughness	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall strength	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall flexibility	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall durability	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall resistance	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall toughness	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall strength	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall flexibility	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall durability	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall resistance	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall toughness	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall strength	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall flexibility	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall durability	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall resistance	MPa	1.0	MPa	1.0	MPa	1.0	MPa	1.0
Cell wall toughness	MPa	1.0	MPa	1.0				

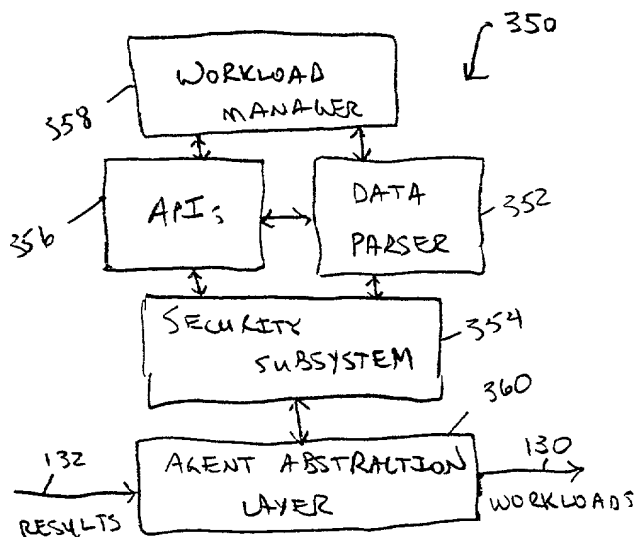


FIG. 36

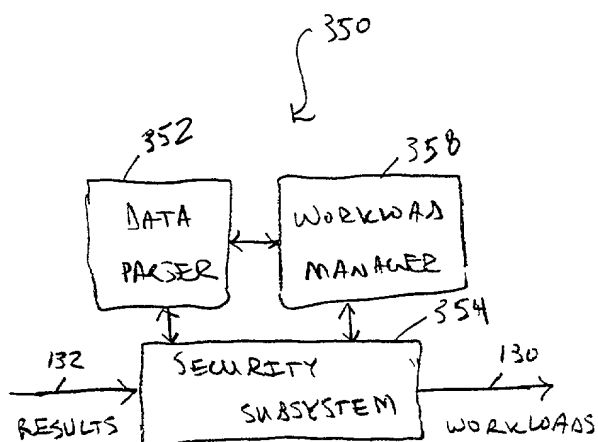


FIG. 3D

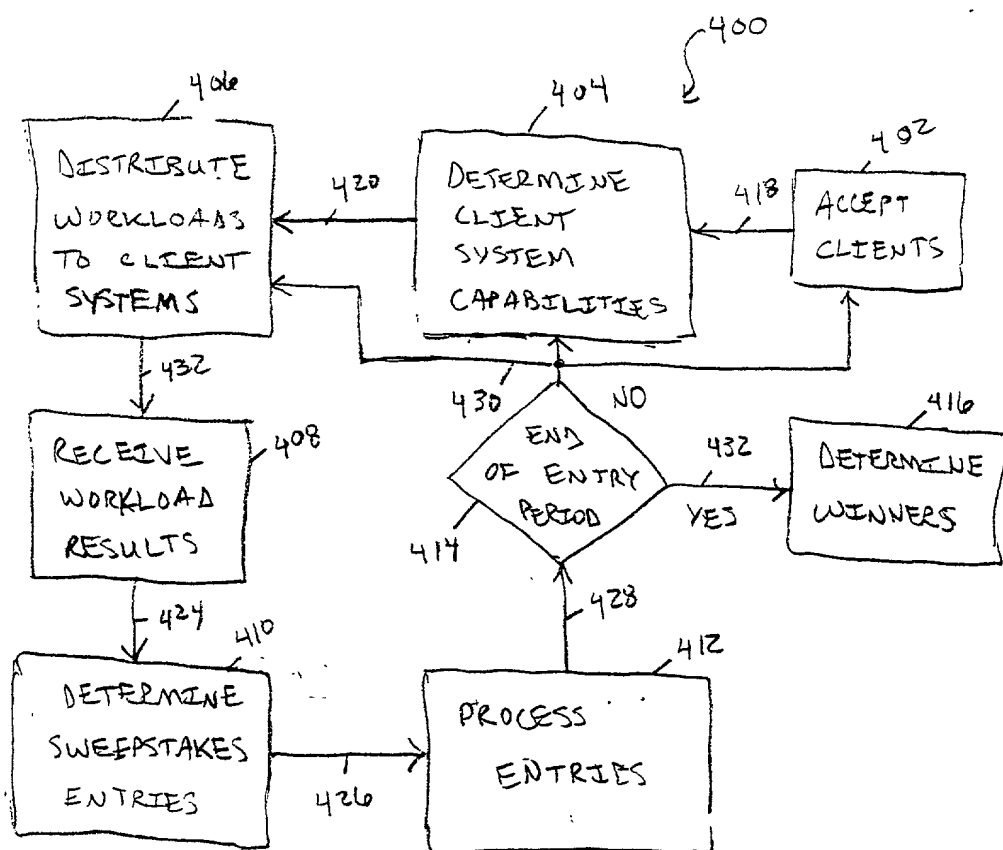
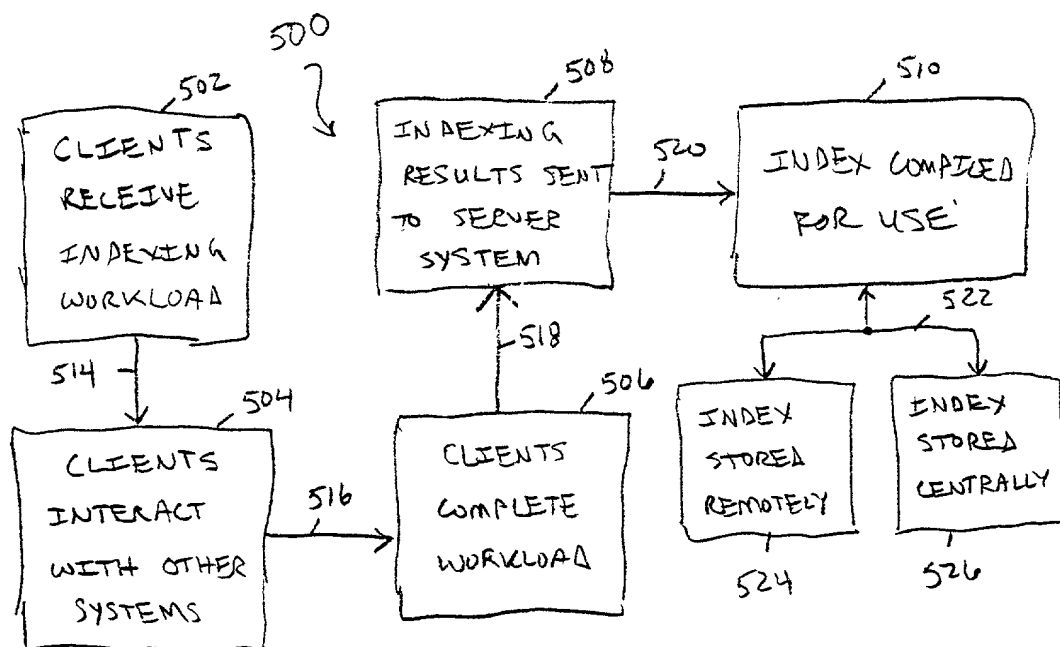
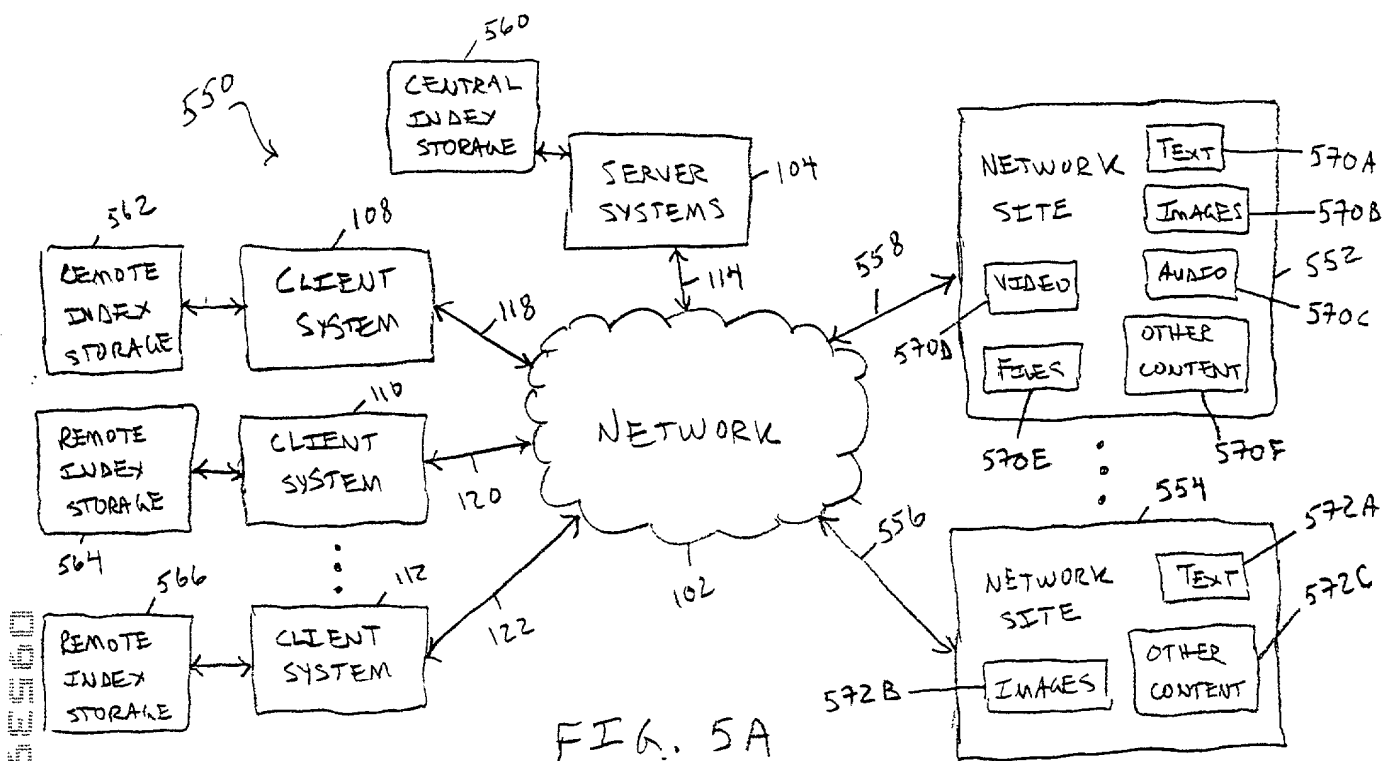


FIG. 4





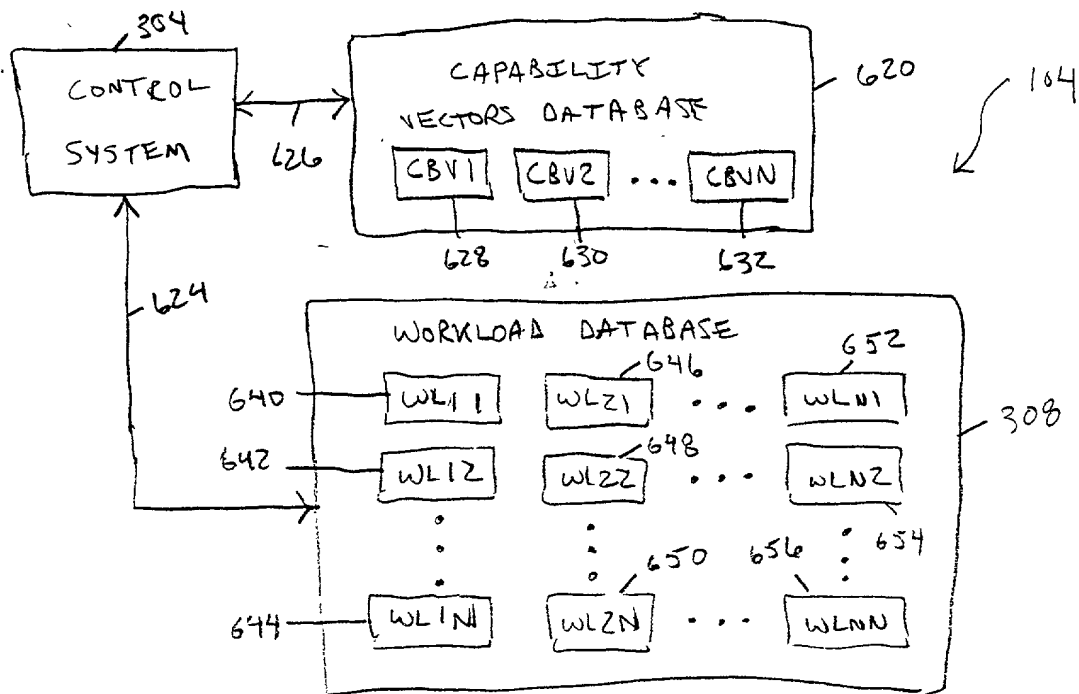


FIG. 6A

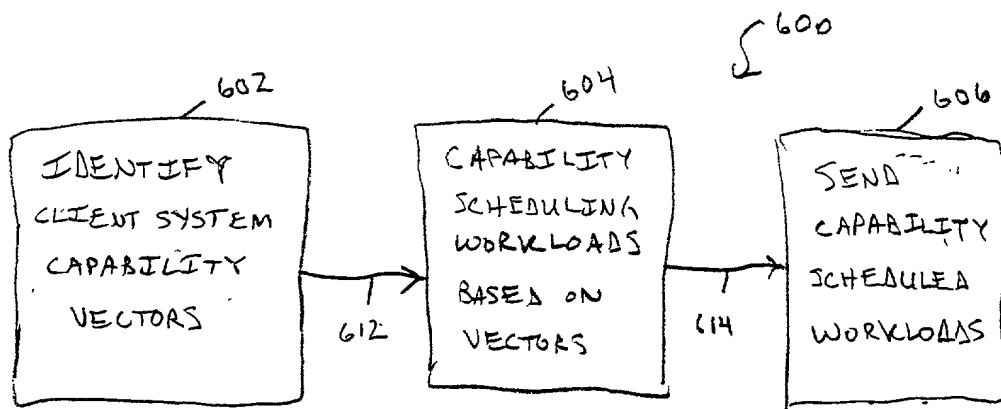


FIG. 6B

```
graph TD; 702[CLIENTS RECEIVE TESTING WORKLOAD] -- 714 --> 704[CLIENTS INTERACT WITH OTHER SYSTEMS]; 704 -- 716 --> 706[CLIENTS COMPLETE TESTING WORKLOAD]; 706 -- 718 --> 708[SITE TESTING RESULTS SENT TO SERVER SYSTEM]; 708 -- 720 --> 710[SITE TESTING RESULTS COMPILED FOR USE];
```

FIG. 7B

FIG. 7B

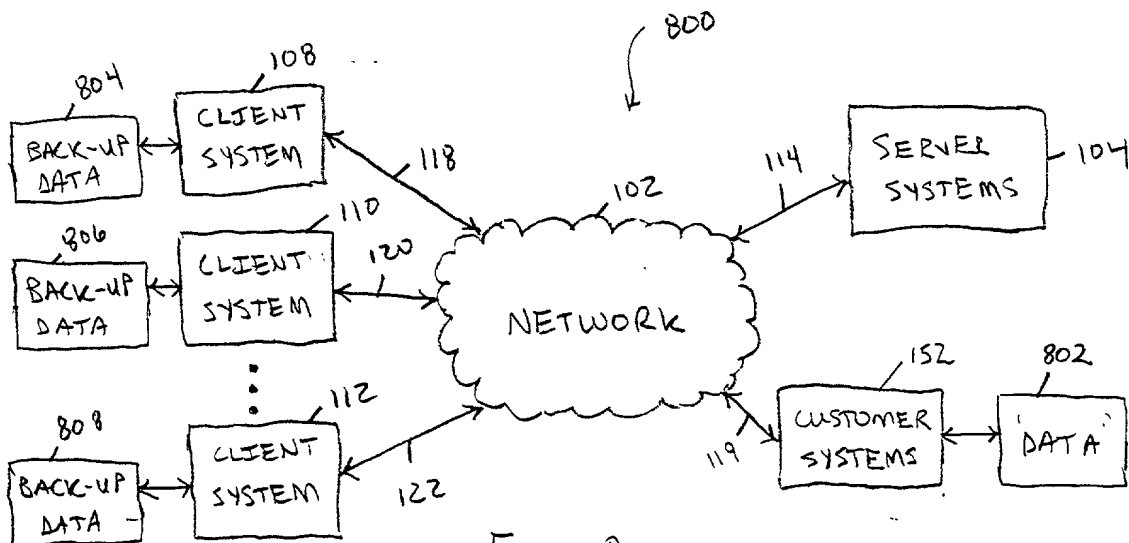


FIG. 3

DECLARATION FOR PATENT APPLICATION AND  
POWER OF ATTORNEY

As an undersigned inventor, I hereby declare that:

My residence, post office address and country of citizenship are as stated directly below my name.

I believe (check one) ☒ I am the original, first and sole inventor

☐ I am a joint inventor and the below named inventors are the  
original and first inventors

of the subject matter which is claimed and for which a patent is sought on the invention entitled

**DISTRIBUTED BACK-UP SYSTEM AND ASSOCIATED METHOD**

the specification of which

(check one) ☒ is attached hereto.

☐ was filed on \_\_\_\_\_,  
as Application Serial No. \_\_\_\_\_,  
and was amended on \_\_\_\_\_.  
(if applicable)

I further declare that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office (hereinafter "the Office") all information known to me to be material to patentability of the subject matter which is claimed as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate indicated below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)  
Number                      Country

Day/Month/Year Filed

Priority  
Claimed  
Yes      No

None

I hereby claim the benefit under 35 U.S. C. §119(e) of any United States provisional application listed below:

**Provisional Application Serial No.**

None

**Filing Date**

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**Application Serial No.**

**Filing Date**

**Status (patented, pending, abandoned)**

None

I hereby appoint: Robert M. O'Keefe (Reg. No. 35,630), Richard D. Egan (Reg. No. 36,788), Brian W. Peterman (Reg. No. 37,908), and William W. Enders (Reg. No. 41,735), each an attorney of the firm of O'KEEFE, EGAN & PETERMAN, as its attorneys for so long as they remain with such firm, with full power of substitution and revocation, to prosecute the application, to make alterations and amendments therein, to transact all business in the Patent and Trademark Office in connection therewith, and to receive any Letters Patent, and for one year after issuance of such Letters Patent to file any request for a certificate of correction that may be deemed appropriate.

Address all telephone calls to Brian W. Peterman at telephone number (512) 347-1611.

Address all correspondence to:

Brian W. Peterman  
O'KEEFE, EGAN & PETERMAN  
1101 Capital of Texas Highway South  
Building C, Suite 200  
Austin, TX 78746  
(512) 347-1611  
(512) 347-1615 (Fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and may jeopardize the validity of the application or any patent issued thereon.

[illegible]

Residence Address: 204 Calico Bush Lane, Round Rock TX 78664  
(Including Postal Code)

Citizenship: USA

Post Office Address: 204 Calico Bush Lane, Round Rock, TX 78664  
(Including Postal Code)